



- 93%
-
- 4kV 6kV
-
- IP67
- SELV
- 5

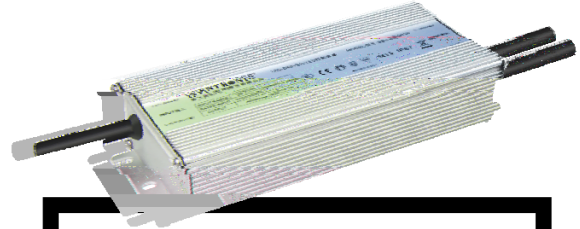


EBV - 400SxxxSV

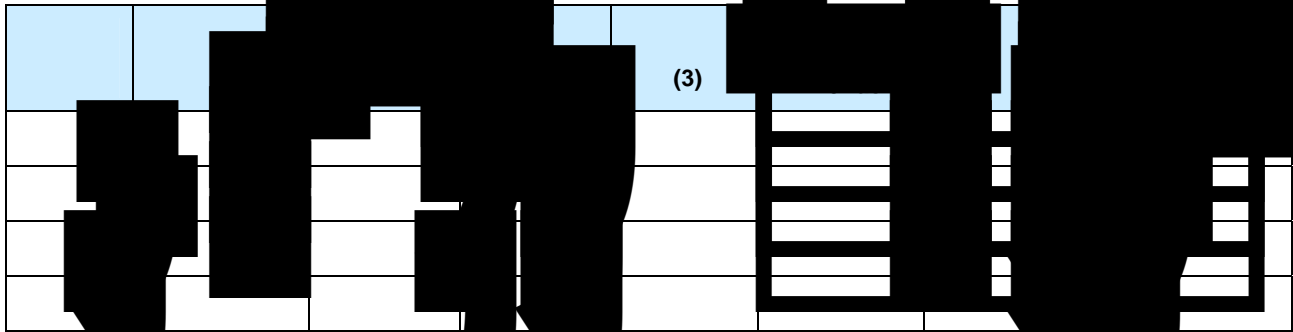



1	AC	220/230/240V	50/60Hz	200-240Vac	BIS
2		90-305V	50/60Hz	"	"
3		220Vac, 100%	"	"	"
4	SELV				
5	BIS	-3000			




降额曲线

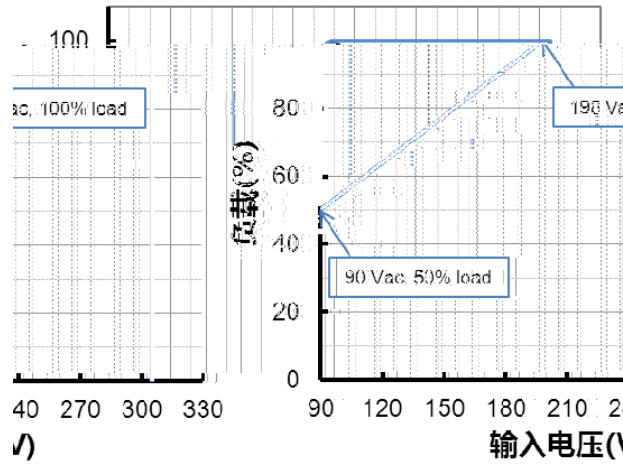


寿命 vs. 壳温

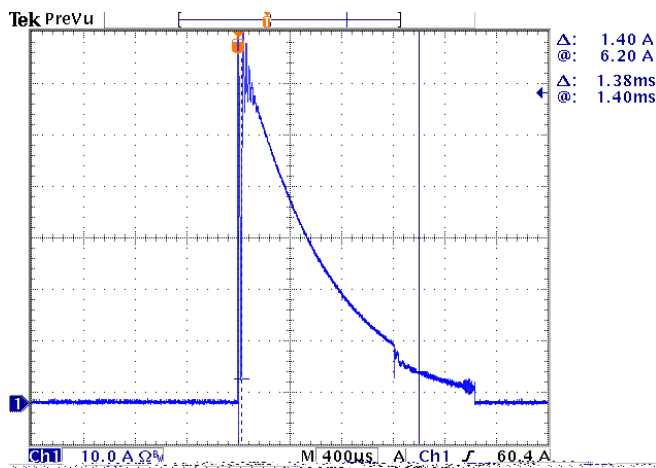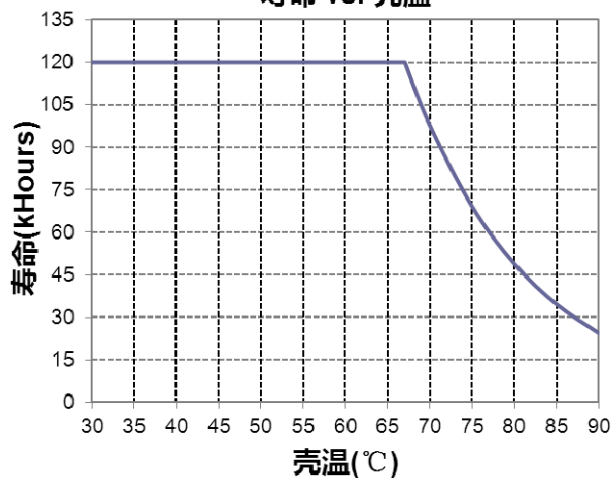


EBV-400S012SV
效率 vs. 输出电流




EBV-400S024SV
效率 vs. 输出电流

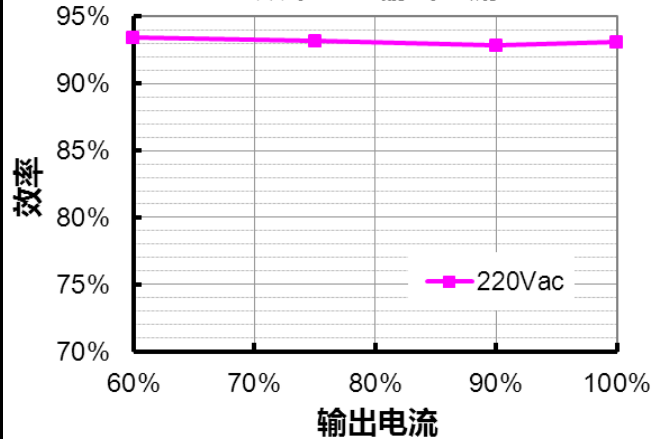


EBV-400S036SV
效率 vs. 输出电流

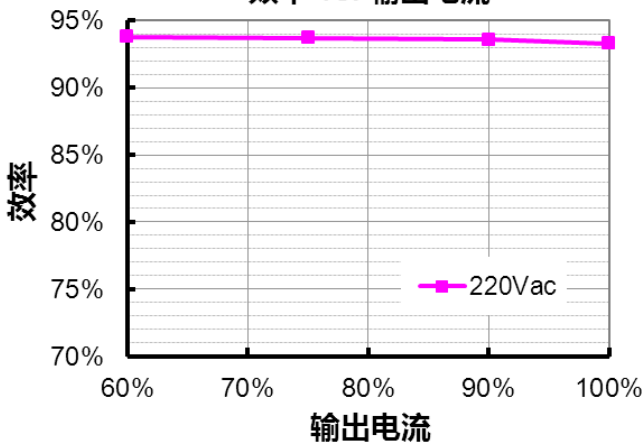


EBV-400S048SV
效率 vs. 输出电流

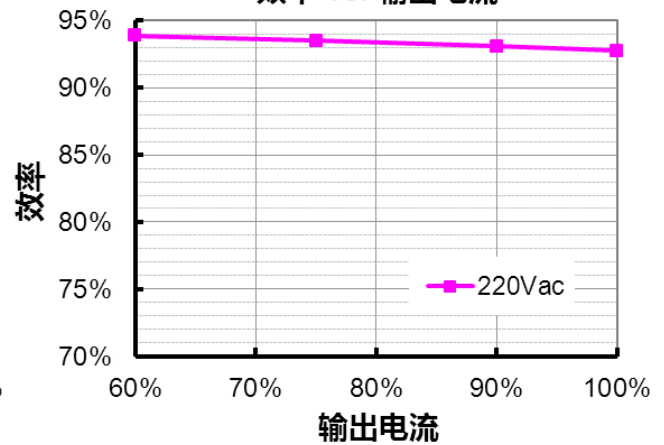

功率因数 vs. 负载

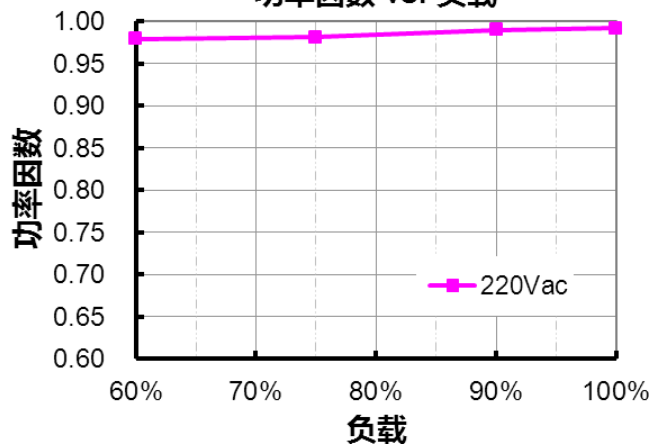

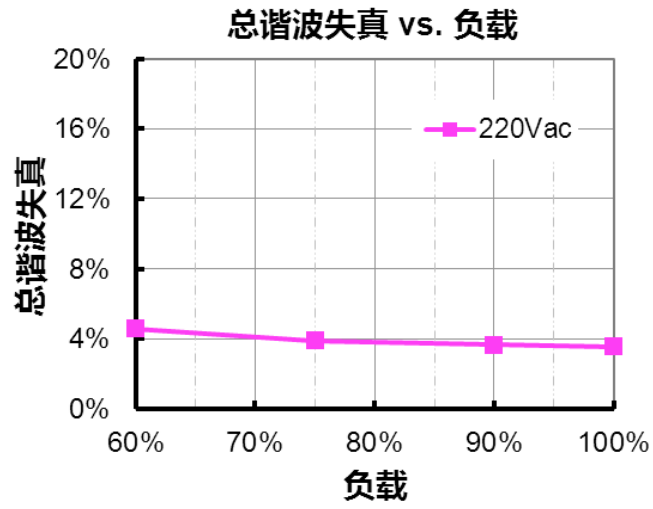

EBV-400S012/024SV



2



1.5mm²

14.5A

2

2

EBV-400S036/048SV

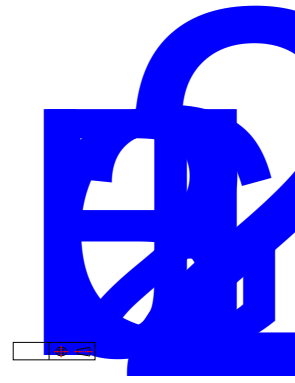

INVENTRONICS

EBV-400SxxxSV

Re

IP67

			/
			/
	CE		/
	CP		/
	EM		/
	BIS		/
		1	CCC
		240Vac	240Vac
		CCC	IS
		5	-3000
	@ 220Vac		

INVENTRONICS

EBV-400SxxxSV

Rev. C

400V

		/	
		/	
		/	