


INVENTRONICS

PRG-NFC-x

Rev. A

E =:
 Z_a^a 9ook) +
 LJ9
 ⊕+) PI > \$E =: \$ & ⊕* ' PI > \$E =: \$?

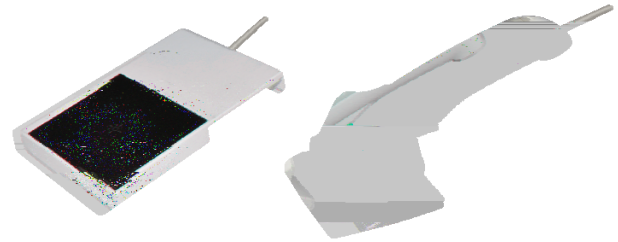

PI > \$E =: \$x

LJ9

E =:

E =:

PI > \$E =: \$	E =:	=e^ : PI \$' \$L J9
PI > \$E =: \$?	E =:	=e^ @: \$PI ? (' (\$L J9


		\$, MŽ LJ9ž	\$
	PI > \$E =: \$	\$	\$	(, ' m8
	PI > \$E =: \$?	\$	\$, '' m8
	PI > \$E =: \$	\$	\$	(' ' mN
	PI > \$E =: \$?	\$	\$, '' mN
		\$	(*% - D ? z	\$

	PI > \$	Ž x x ž	, %, x *%(x' % (898 &
	E =: \$	Ž x x ž	(++ x /+ x (/	
	PI > \$	Ž x x ž	0%- x *%+ x *%,	89J
	E =: \$?	Ž x x ž) *' x (' ' x /'	
	PI > \$E =: \$	\$	(, ^	\$

	PI > \$E =: \$?	\$	*)' ^	\$

	PI > \$E =: \$	\$)' :	\$	+ -' :
	PI > \$E =: \$?	' :	\$	+, ' :
	PI > \$E =: \$	\$+' :	\$	+/, :
	PI > \$E =: \$?	\$)' :	\$	+. ' :
				1, to 0, %

Low Voltage	EN 60950
Human Exposure	EN 50364
Europe	EN 300 330
USA	FCC 47 CFR Part 15
Canada	IC RSS-Gen, RSS-210
EMC	EN 301 489
WEEE	2002/96/EC
Vibration	EN 60068-2-6; 10-150Hz, 0.075mm / 1 g
Shock	EN 60068-27; acceleration: 30 g



USB

LJ9

<http://cn.inventronics-co.com/fuwu.html>






LJ9

<https://www.feig.de/en/>




	PRG-NFC-D	PRG-NFC-H
	CPR30USB	MR_PR_PRH101
	reader	hf_reader

<http://cn.inventronics-co.com/fuwu.html>

PRG-NFC-D

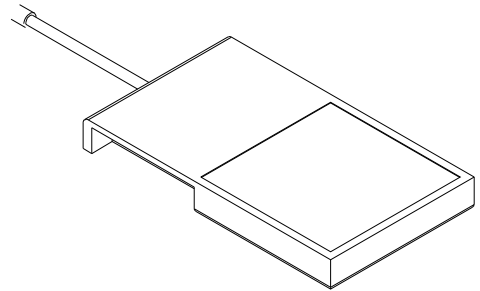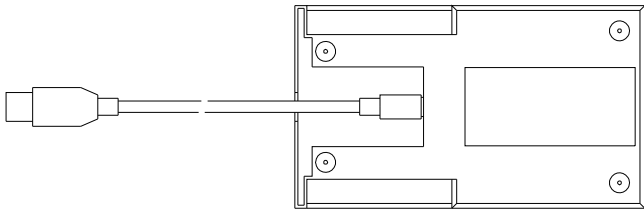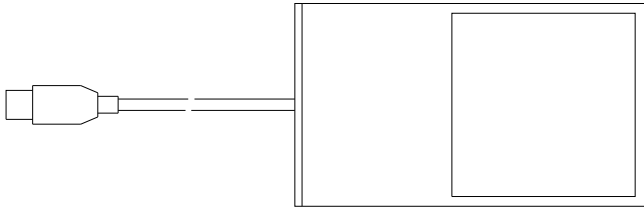

PRG-NFC-H

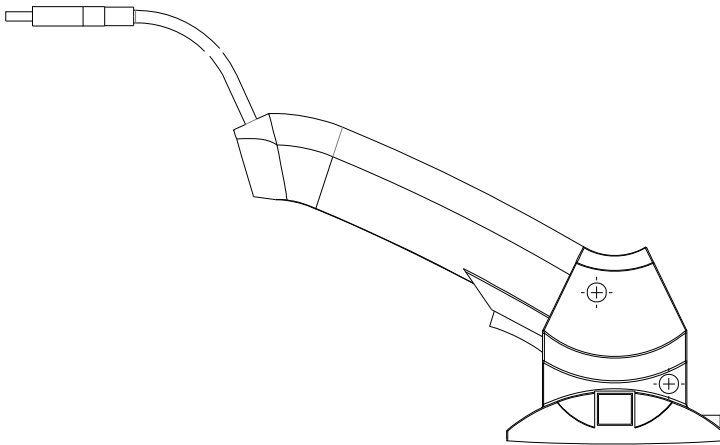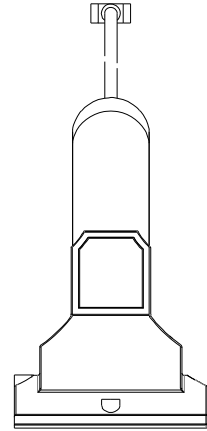

INVENTRONICS

PRG-NFC-x

Rev. A

I o? J)' ((& , &<L

<L)' (, &/ - *

INVENTRONICS

PRG-NFC-x

Rev. A

		Item	From	To
2019-01-19	A		/	/