

	-	-	0.75 MIU	UL8750; 277Vac/60Hz
	-	-	0.70 mA	IEC60598-1; 240Vac/60Hz
	-	-	046 A	
	-	-	0.24 A	
	-	-	0.68 A ² s	370
	0.90	-	-	
	-	-	20%	
	-	-	10%	



	-5%loset	-	5%loset	
LUR-040S105ST LUR-040S150ST	700 mA 1000 mA	- -	1050 mA 1500 mA	


LUR-040S105ST 700 mA - 1050 mA
 LUR-040S150ST 1000 mA - .8 ref200.52 371.3 .42 34.8 ref255.66 371.3 4200198 4(- 5U)-5.7(15)-6.

@120Vac				
LUR-040S105ST	Io=700 mA	83.0%	85.0%	-
	Io=1050 mA	83.0%	85.0%	-
LUR-040S150ST	Io=1000 mA	83.0%	85.0%	-
	Io=1500 mA	82.5%	84.5%	-
@220Vac				
LUR-040S105ST	Io=700 mA	85.0%	87.0%	-
	Io=1050 mA	85.0%	87.0%	-
LUR-040S150ST	Io=1000 mA	85.5%	87.5%	-
	Io=1500 mA	85.0%	87.0%	-
@277Vac				
LUR-040S105ST	Io=700 mA	85.5%	87.5%	-
	Io=1050 mA	85.5%	87.5%	-
LUR-040S150ST	Io=1000 mA	86.0%	88.0%	-
	Io=1500 mA	85.5%	87.5%	-
	-		434,000 Hours	-
	-		116,000 Hours	-
	-40 °C	-	+85 °C	
	-40 °C	-	+75 °C	: 10% RH to 90% RH.
	-40 °C	-	+85 °C	: 5% RH to 95% RH
	-	415 g	-	

UL/CUL	UL 8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KS	KS C 7655


EN 55015/GB 17743 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

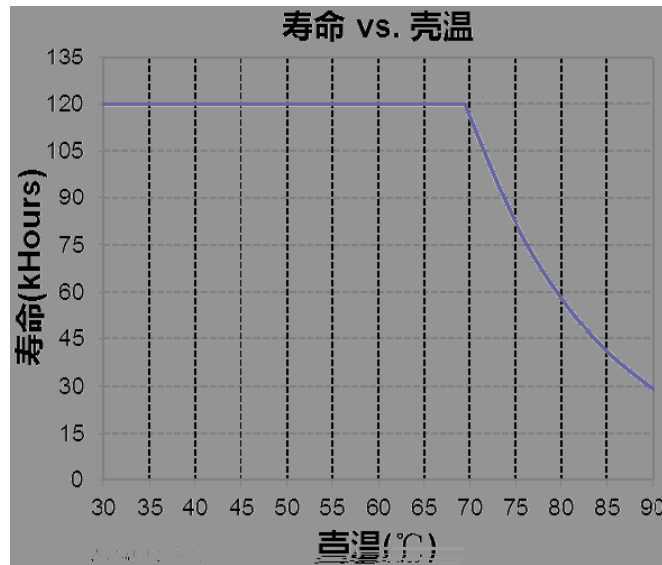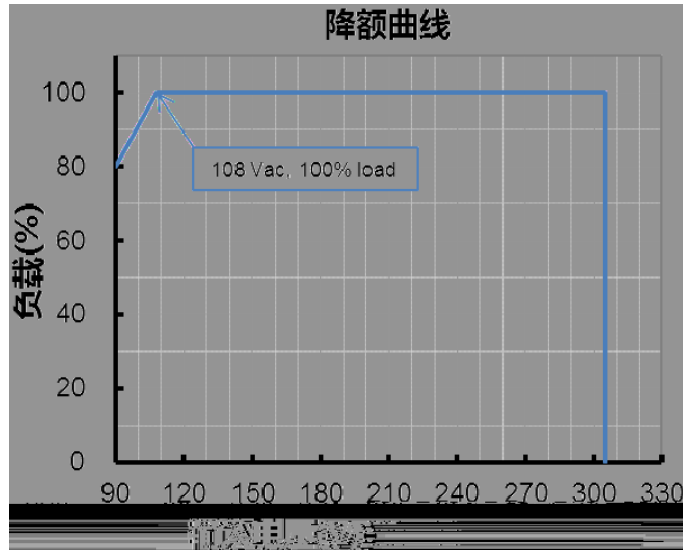

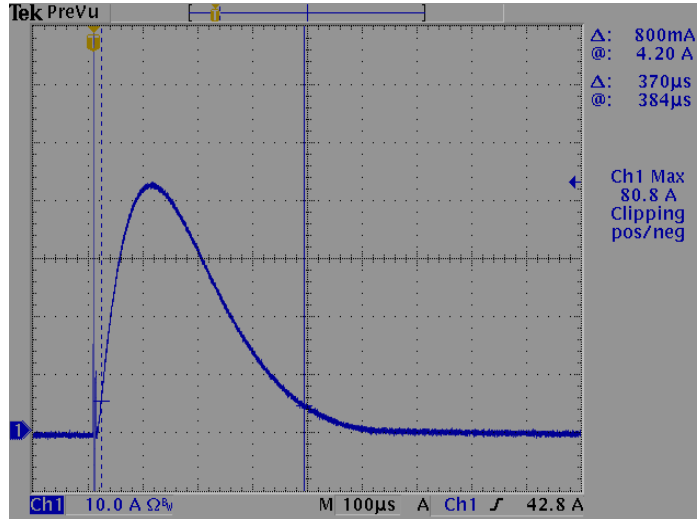


LUR-040S105ST(Io=700mA)

效率 vs. 输出电压

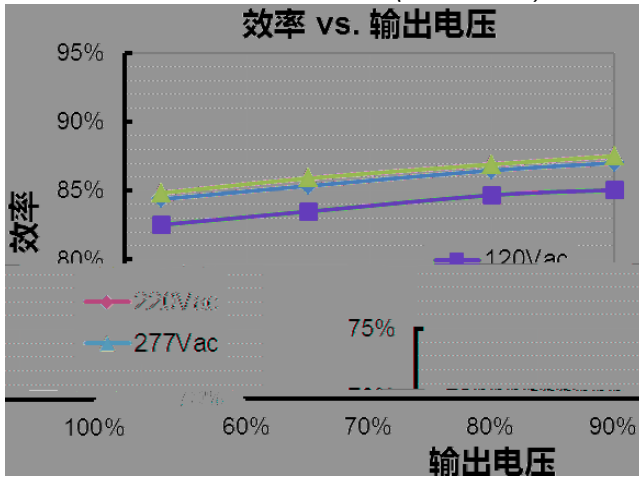


LUR-040S105ST(Io=1050mA)

效率 vs. 输出电压

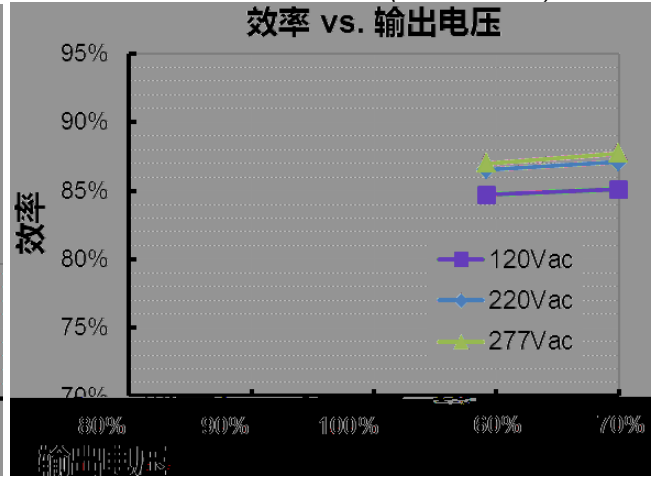


LUR-040S150ST (Io=1100mA)

效率 vs. 输出电压

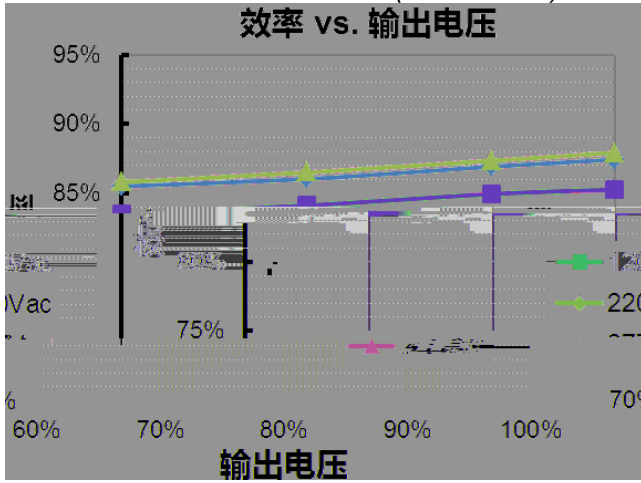


LUR-040S150ST (Io=1500mA)


效率 vs. 输出电压


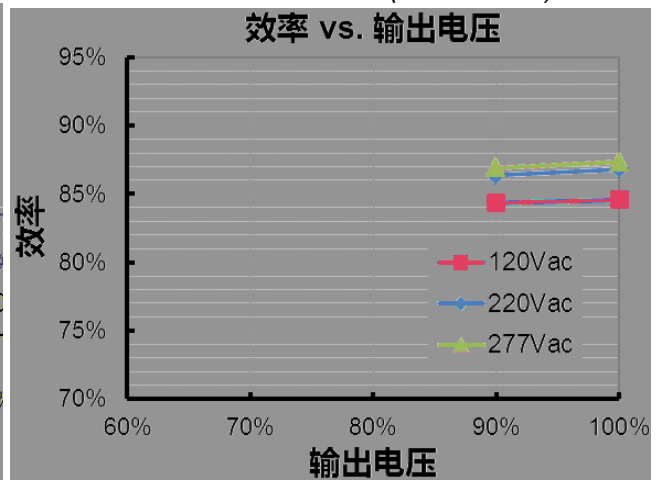


功率因数 vs. 负载

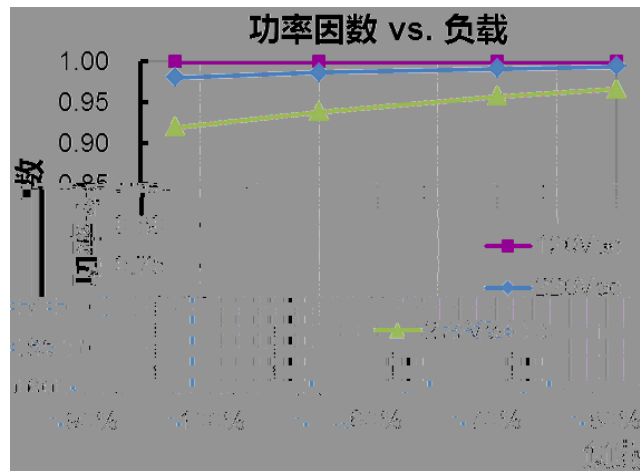

总谐波失真 vs. 负载

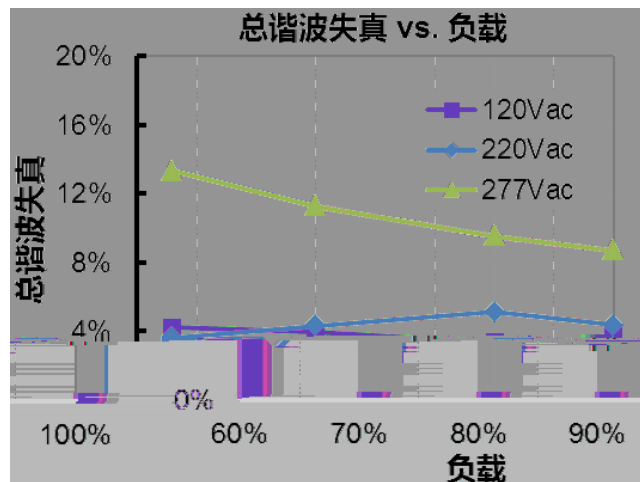



PROJ:

: ±1

INVENTRONICS

LUR-040SxxxST

Rev. A

2020-10-16 A